


Metal protection conduit for Ex Applications

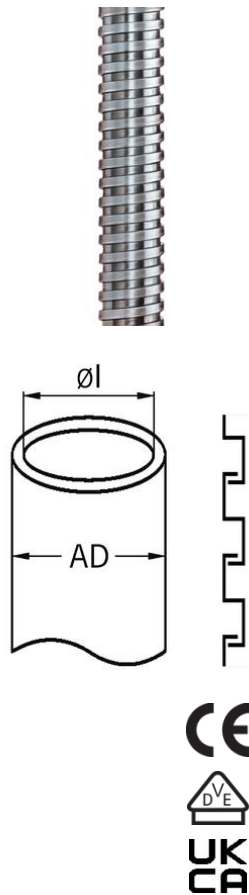

Protective metal conduit non liquid-tight

- Protective metal conduit non liquid-tight
- SPR-AS

Article no:	1010.111.018
E-No:	125450499
EAN:	7611614015071
Material	zinc coated steel
Properties	Highly flexible, stretch resistant, lateral crush resistant
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations
Tested acc. to	EN / IEC 61386-23
Protection class	IP 40
Operation temperature	-50°C / +250°C
Outer diameter	21 mm
Inner diameter	18 mm
Bending radius static	40 mm
Bending radius dynamic	100 mm
Bushing	5031.027.016
Dispatch	50