


## Protective metal conduit non liquid-tight

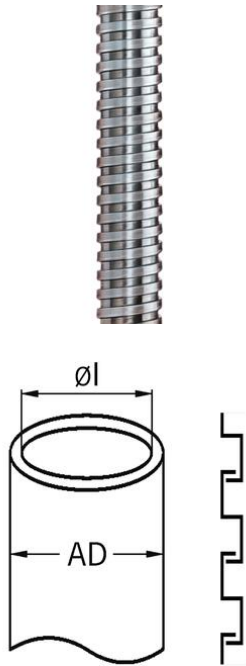

### Protective metal conduit non liquid-tight

- Protective metal conduit non liquid-tight
- SPR-VA

|                        |                                                                                                                              |
|------------------------|------------------------------------------------------------------------------------------------------------------------------|
| <b>Article no:</b>     | <b>1010.801.023</b>                                                                                                          |
| E-No:                  | 125486599                                                                                                                    |
| EAN:                   | 7611614202242                                                                                                                |
| Material               | Stainless steel A2                                                                                                           |
| Properties             | Highly flexible, stretch resistant, lateral crush resistant, high temperature stability                                      |
| Application            | Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations, sensor technology |
| Protection class       | IP 40                                                                                                                        |
| Operation temperature  | -200°C / +600°C                                                                                                              |
| Outer diameter         | 27 mm                                                                                                                        |
| Inner diameter         | 23 mm                                                                                                                        |
| Bending radius static  | 48 mm                                                                                                                        |
| Bending radius dynamic | 120 mm                                                                                                                       |
| Bushing                | 5031.027.021                                                                                                                 |
| Dispatch               | 50                                                                                                                           |