


## Metal protection conduit for Ex Applications

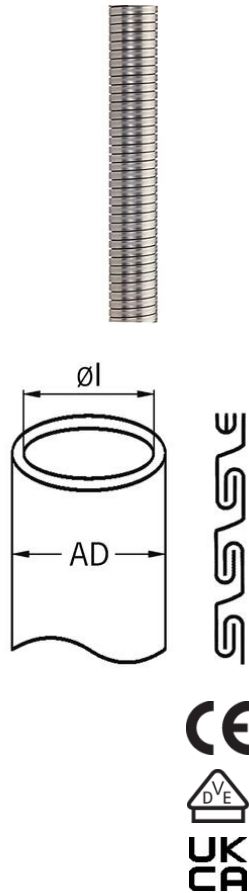

### Protective metal conduit non liquid-tight

- Protective metal conduit non liquid-tight
- FLEXAgraff®-AS

|                        |                                                                                                           |
|------------------------|-----------------------------------------------------------------------------------------------------------|
| Article no:            | 1080.101.024                                                                                              |
| E-No:                  | 125451599                                                                                                 |
| EAN:                   | 7611614202310                                                                                             |
| Material               | Steel galvanized, double-overlapped                                                                       |
| Properties             | High tensile, torsional- and bending strength, highly flexible, no untwisting of the conduit              |
| Application            | Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations |
| Tested acc. to         | EN / IEC 61386-23                                                                                         |
| Protection class       | IP 40                                                                                                     |
| Operation temperature  | -50°C / +250°C                                                                                            |
| Outer diameter         | 27 mm                                                                                                     |
| Inner diameter         | 24 mm                                                                                                     |
| Bending radius static  | 90 mm                                                                                                     |
| Bending radius dynamic | 225 mm                                                                                                    |
| Bushing                | 5031.039.021                                                                                              |
| Dispatch               | 50                                                                                                        |

### Available on request:

- Stainless steel A2