


## Protective metal conduit liquid-tight

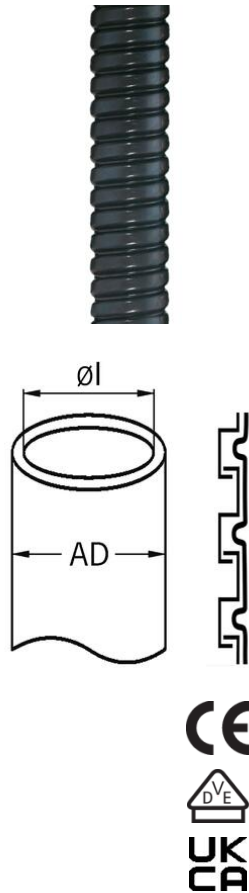

### Protective metal conduit liquid-tight

- Protective metal conduit liquid-tight
- SPR-PVC-AS
- Black

|                        |                                                                                                                                                  |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Article no:</b>     | <b>2010.112.038</b>                                                                                                                              |
| E-No:                  | 125481700                                                                                                                                        |
| EAN:                   | 7611614158617                                                                                                                                    |
| Material               | zinc coated steel                                                                                                                                |
| Sheathing              | PVC                                                                                                                                              |
| Properties             | Weatherproof, watertight, widely resistant to seawater, acids and oils, free of silicone and cadmium, very flexible, stretch and crush resistant |
| Application            | Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations                                        |
| Tested acc. to         | EN / IEC 61386-23                                                                                                                                |
| Protection class       | IP 68                                                                                                                                            |
| Operation temperature  | -25°C / +90°C / ^ +100°C                                                                                                                         |
| Outer diameter         | 45 mm                                                                                                                                            |
| Inner diameter         | 38 mm                                                                                                                                            |
| Bending radius static  | 120 mm                                                                                                                                           |
| Bending radius dynamic | 300 mm                                                                                                                                           |
| Bushing                | 5031.028.036                                                                                                                                     |
| Dispatch               | 25                                                                                                                                               |