


## Synthetic protective conduit liquid-tight

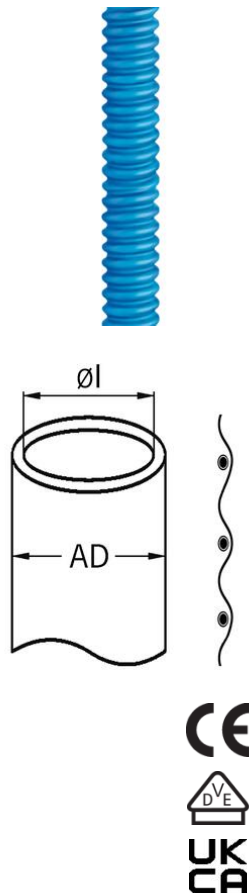

### Synthetic protective conduit liquid-tight

- Synthetic protective conduit liquid-tight
- AIRflex®-KUW-PU-AS
- Metallic blue

|                        |                                                                                                                                                                                                                                                                 |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Article no:</b>     | <b>2040.701.016</b>                                                                                                                                                                                                                                             |
| E-No:                  | 125280402                                                                                                                                                                                                                                                       |
| EAN:                   | 7611614059570                                                                                                                                                                                                                                                   |
| Material               | Polyurethane jacket, inside helix of plastic sheathed spring steel wire                                                                                                                                                                                         |
| Properties             | Extremely flexible, highly expansible and upsettable, airtight and liquid-proof, high tenacity and abrasion resistance, oil-, petrol- and grease-resistant, widely resistant to solvents and acids, free of halogen, silicone and cadmium, microbe resistant, o |
| Application            | Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations                                                                                                                                                       |
| Tested acc. to         | EN / IEC 61386-23                                                                                                                                                                                                                                               |
| Protection class       | IP 68                                                                                                                                                                                                                                                           |
| Operation temperature  | -40°C / +100°C / ^ +120°C                                                                                                                                                                                                                                       |
| Outer diameter         | 21 mm                                                                                                                                                                                                                                                           |
| Inner diameter         | 16 mm                                                                                                                                                                                                                                                           |
| Bending radius static  | 17 mm                                                                                                                                                                                                                                                           |
| Bending radius dynamic | 45 mm                                                                                                                                                                                                                                                           |
| Bushing                | 5020.030.016                                                                                                                                                                                                                                                    |
| Dispatch               | 50                                                                                                                                                                                                                                                              |