


Protective metal conduits liquid-proof LIQUID-TIGHT

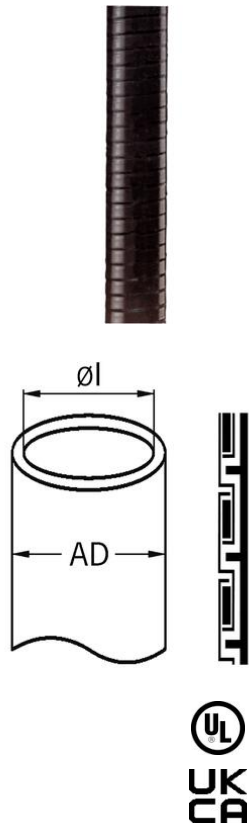

Protective metal conduits liquid-proof LIQUID-TIGHT

- Protective metal conduit liquid-tight
- LIQUID-TIGHT-UL
- Black

Article no:	2060.112.035
E-No:	125652700
EAN:	7611614085616
Material	Strip-wound metallic conduit with elevated zinc deposit, incorporated copper ground lead up to dim. 1¼"
Sheathing	Reinforced, flame resistant PVC
Properties	Extremely solid flexible metal conduit core, liquid-tight, widely resistant to oil and acids, free of silicone and cadmium
Application	For extremely high mechanical stress on machines and plants
Approval	UL-File No. E 51430 by the Underwriters Laboratories Inc. acc. to UL 360.
Protection class	IP 68
Operation temperature	-25°C / +70°C / ^ +100°C
Outer diameter	1 1/4" mm
Inner diameter	35.5 mm
Diameter A	42.0 mm
Bending radius static	260 mm
Bending radius dynamic	650 mm
Bushing	0601.000.036
Dispatch	25