


## Protective metal conduit liquid-tight

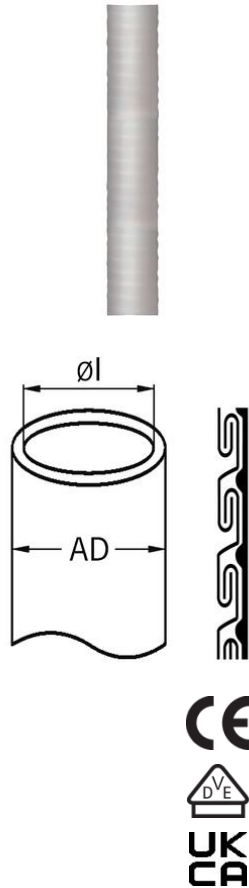

### Protective metal conduit liquid-tight

- Protective metal conduit liquid-tight
- FLEXAgraff®-SI-ASF
- Grey

<b>Article no:</b>	<b>2140.801.037</b>
E-No:	125690709
EAN:	7611614117645
Material	Steel galvanized, double-overlapped
Sheathing	Silicone
Properties	High tensile strength and torsional safety due to double overlapped profile, silicone jacket provides good electrical insulation, very good resistance to ozone, ultra-violet radiation and atmospheric influences, no untwisting of the conduit, oil-, petrol-
Application	Machine and plant constructions, vehicle construction, rail vehicles outside applications, shipbuilding, automation, electrical installations
Tested acc. to	EN / IEC 61386-23
Protection class	IP 68
Operation temperature	-50°C / +180°C
Outer diameter	45 mm
Inner diameter	37 mm
Bending radius static	150 mm
Bending radius dynamic	375 mm
Bushing	5031.037.036
Dispatch	25

For applications exceeding +80°C PTFE-sealing required!