


Metal protective EMC conduits liquid-tight

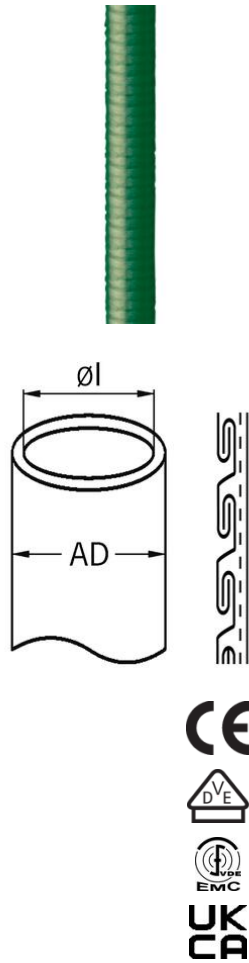

Metal protective EMC conduits liquid-tight

- Metal protective EMC conduits liquid-tight
- FLEXAgraff®-CU-PU-AS
- Green

Article no:	2540.707.013
E-No:	125692204
EAN:	7611614158112
Material	Cold strip DC03 acc. to EN 10139 galvanized, double-overlapped, tinned copper wire braiding
Sheathing	Polyurethane
Properties	High torsional- and tensile strength, liquid-proof, absolutely oil-, petrol- and grease resistant, widely resistant to solvents and acids, free of halogen, silicone and cadmium
Application	Machine and plant constructions, vehicle construction, shipbuilding, railway, automation, electrical installations, EMC applications
Screening attenuation	Shielding factor up to 30 MHz. Up to 80 dB according to EN 50289-1-6
Tested acc. to	EN / IEC 61386-23
Protection class	IP 68
Operation temperature	-50°C / +100°C / ^ +130°C
Outer diameter	17 mm
Inner diameter	13 mm
Bending radius static	60 mm
Bending radius dynamic	150 mm
Bushing	5031.028.011
Dispatch	25

For EMC applications brass thrust collar necessary!