


Metal protective EMC conduit non liquid-tight

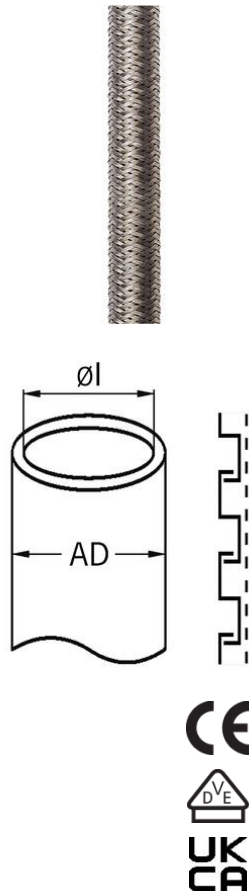

Metal protective EMC conduit non liquid-tight

- Metal protective EMC conduit non liquid-tight
- SPR-EDU-AS

Article no:	4010.111.017
E-No:	125481499
EAN:	7611614015194
Material	zinc coated steel
Sheathing	Galvanized steel wire
Properties	Provides high mechanical protection due to high tensile, torsional and bending strength, highly flexible, no untwisting of the conduit
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations, EMC applications
Screening attenuation	10 KHz = 30 dB
Tested acc. to	EN / IEC 61386-23
Protection class	IP 40
Operation temperature	-50°C / +250°C
Outer diameter	21 mm
Inner diameter	17 mm
Bending radius static	38 mm
Bending radius dynamic	95 mm
Bushing	5031.028.016
Dispatch	50

For EMC applications brass thrust collar necessary!