


## Metal protective EMC conduit non liquid-tight

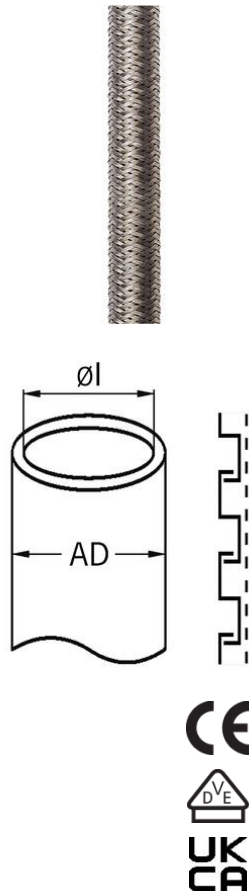

### Metal protective EMC conduit non liquid-tight

- Metal protective EMC conduit non liquid-tight
- SPR-EDU-AS

|                        |                                                                                                                                        |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Article no:</b>     | <b>4010.111.038</b>                                                                                                                    |
| E-No:                  | 125481799                                                                                                                              |
| EAN:                   | 7611614015224                                                                                                                          |
| Material               | zinc coated steel                                                                                                                      |
| Sheathing              | Galvanized steel wire                                                                                                                  |
| Properties             | Provides high mechanical protection due to high tensile, torsional and bending strength, highly flexible, no untwisting of the conduit |
| Application            | Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations, EMC applications            |
| Screening attenuation  | 10 KHz = 30 dB                                                                                                                         |
| Tested acc. to         | EN / IEC 61386-23                                                                                                                      |
| Protection class       | IP 40                                                                                                                                  |
| Operation temperature  | -50°C / +250°C                                                                                                                         |
| Outer diameter         | 45 mm                                                                                                                                  |
| Inner diameter         | 38 mm                                                                                                                                  |
| Bending radius static  | 80 mm                                                                                                                                  |
| Bending radius dynamic | 200 mm                                                                                                                                 |
| Bushing                | 5031.028.036                                                                                                                           |
| Dispatch               | 25                                                                                                                                     |

For EMC applications brass thrust collar necessary!