


## Metal protective EMC conduit non liquid-tight

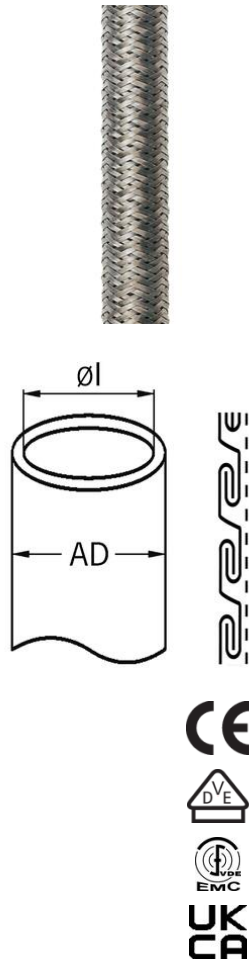

### Metal protective EMC conduit non liquid-tight

- Metal protective EMC conduit non liquid-tight
- FLEXAgraff®-CU-AS

|                        |                                                                                                                                      |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Article no:            | 4110.701.017                                                                                                                         |
| E-No:                  | 125691499                                                                                                                            |
| EAN:                   | 7611614158983                                                                                                                        |
| Material               | Steel galvanized, double-overlapped                                                                                                  |
| Braiding               | Tinned copper                                                                                                                        |
| Properties             | High torsional- and tensile strength, no untwisting of the conduit, very flexible                                                    |
| Application            | Machine and plant constructions, vehicle construction, shipbuilding, railway, automation, electrical installations, EMC applications |
| Screening attenuation  | Shielding factor up to 30 MHz. Up to 80 dB according to EN 50289-1-6                                                                 |
| Tested acc. to         | EN / IEC 61386-23                                                                                                                    |
| Protection class       | IP 40                                                                                                                                |
| Operation temperature  | -50°C / +250°C                                                                                                                       |
| Outer diameter         | 21 mm                                                                                                                                |
| Inner diameter         | 17 mm                                                                                                                                |
| Bending radius static  | 70 mm                                                                                                                                |
| Bending radius dynamic | 175 mm                                                                                                                               |
| Bushing                | 5031.028.016                                                                                                                         |
| Dispatch               | 25                                                                                                                                   |

For EMC applications brass thrust collar necessary!