
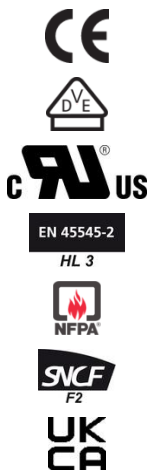


Synthetic conduit connector 45° bend



Synthetic conduit connector 45° bend with entry thread nickel-plated brass

- Quick connector RQBK45-M
- Black

Article no:	5102.013.216
E-No:	126823400
EAN:	7611614156170
Material	Flexamid (HL 3)
Entry thread	Nickel-plated brass
Seal	TPE
Fire classification	V0 (UL 94)
Properties	Quick and pull-out-proof installation by means of the «push-in» lock, simple dismounting by displacing the snap-in sleeve
Protection class	IP 68 / IP 69
Operation temperature	-40°C / +120°C
Outer diameter	13.0 mm
Entry thread (G)	M16x1.5
Diameter Ø I	8.5 mm
Diameter Ø B	20.0 mm
Dimension C	12.0 mm
Dimension E	42.5 mm
Dimension F	48.0 mm
Wrench size	21 mm
Dispatch	50