
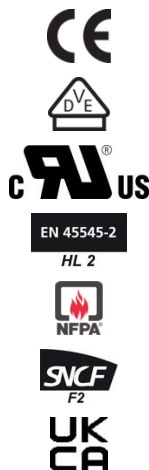


Synthetic conduit connector 45° bend



Synthetic conduit connector 45° bend with entry thread nickel-plated brass

- Quick connector RQBK45-M
- Black

Article no:	5102.021.225
E-No:	126823600
EAN:	7611614201375
Material	Flexamid (HL 3)
Entry thread	Nickel-plated brass
Seal	TPE
Fire classification	V0 (UL 94)
Properties	Quick and pull-out-proof installation by means of the «push-in» lock, simple dismounting by displacing the snap-in sleeve
Protection class	IP 68 / IP 69
Operation temperature	-40°C / +120°C
Outer diameter	21.2 mm
Entry thread (G)	M25x1.5
Diameter Ø I	14.5 mm
Diameter Ø B	29.5 mm
Dimension C	13.0 mm
Dimension E	56.0 mm
Dimension F	60.0 mm
Wrench size	26 mm
Dispatch	50