
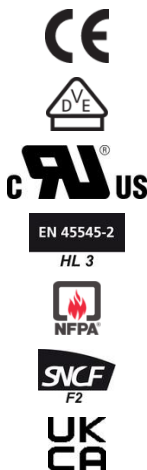


## Synthetic conduit connector 45° bend



### Synthetic conduit connector 45° bend with entry thread nickel-plated brass

- Quick connector RQBK45-M
- Black

|                       |                                                                                                                           |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------|
| Article no:           | 5102.054.250                                                                                                              |
| E-No:                 | 126823901                                                                                                                 |
| EAN:                  | 7611614156231                                                                                                             |
| Material              | Flexamid (HL 3)                                                                                                           |
| Entry thread          | Nickel-plated brass                                                                                                       |
| Seal                  | TPE                                                                                                                       |
| Fire classification   | V0 (UL 94)                                                                                                                |
| Properties            | Quick and pull-out-proof installation by means of the «push-in» lock, simple dismounting by displacing the snap-in sleeve |
| Protection class      | IP 68 / IP 69                                                                                                             |
| Operation temperature | -40°C / +120°C                                                                                                            |
| Outer diameter        | 54.5 mm                                                                                                                   |
| Entry thread (G)      | M50x1.5                                                                                                                   |
| Diameter Ø I          | 35.5 mm                                                                                                                   |
| Diameter Ø B          | 64.0 mm                                                                                                                   |
| Dimension C           | 17.0 mm                                                                                                                   |
| Dimension E           | 92.0 mm                                                                                                                   |
| Dimension F           | 95.0 mm                                                                                                                   |
| Wrench size           | 59 mm                                                                                                                     |
| Dispatch              | 5                                                                                                                         |