
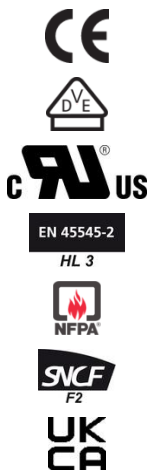


Synthetic conduit connector 45° bend



Synthetic conduit connector 45° bend with entry thread nickel-plated brass

- Quick connector RQBK45-M
- Black

Article no:	5102.054.263
EAN:	7611614237817
Material	Flexamid (HL 3)
Entry thread	Nickel-plated brass
Seal	TPE
Fire classification	V0 (UL 94)
Properties	Quick and pull-out-proof installation by means of the «push-in» lock, simple dismounting by displacing the snap-in sleeve
Protection class	IP 68 / IP 69
Operation temperature	-40°C / +120°C
Outer diameter	54.5 mm
Entry thread (G)	M63x1.5
Diameter Ø I	45.5 mm
Diameter Ø B	64.0 mm
Dimension C	17.0 mm
Dimension E	97.0 mm
Dimension F	100.0 mm
Wrench size	69 mm
Dispatch	5