
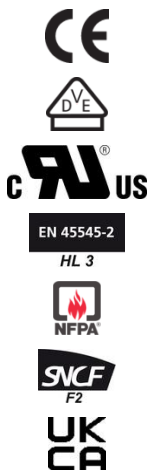


## Synthetic conduit connector bend 90°



### Synthetic conduit connector 90° bend with entry thread nickel-plated brass

- Quick connector RQBK90-M
- Black

|                       |                                                                                                                           |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>Article no:</b>    | <b>5105.054.263</b>                                                                                                       |
| EAN:                  | 7611614238470                                                                                                             |
| Material              | Flexamid (HL 3)                                                                                                           |
| Entry thread          | Nickel-plated brass                                                                                                       |
| Seal                  | TPE                                                                                                                       |
| Fire classification   | V0 (UL 94)                                                                                                                |
| Properties            | Quick and pull-out-proof installation by means of the «push-in» lock, simple dismounting by displacing the snap-in sleeve |
| Protection class      | IP 68 / IP 69                                                                                                             |
| Operation temperature | -40°C / +120°C                                                                                                            |
| Outer diameter        | 54.5 mm                                                                                                                   |
| Entry thread (G)      | M63x1.5                                                                                                                   |
| Diameter Ø I          | 45.5 mm                                                                                                                   |
| Diameter Ø B          | 64.0 mm                                                                                                                   |
| Dimension C           | 17.0 mm                                                                                                                   |
| Dimension E           | 124.5 mm                                                                                                                  |
| Dimension F           | 98.0 mm                                                                                                                   |
| Wrench size           | 60 mm                                                                                                                     |
| Dispatch              | 5                                                                                                                         |

#### Available on request:

- Executions with NPT entry thread