
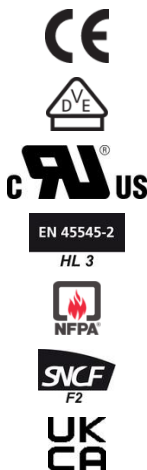


## Synthetic straight conduit connector



### Synthetic straight conduit connector with entry thread nickel-plated brass

- Quick connector RQGK-M
- Black

Article no:	5107.021.220
E-No:	126831501
EAN:	7611614155470
Material	Flexamid (HL 3)
Entry thread	Nickel-plated brass
Seal	TPE
Fire classification	V0 (UL 94)
Properties	Quick and pull-out-proof installation by means of the «push-in» lock, simple dismounting by displacing the snap-in sleeve
Protection class	IP 68 / IP 69
Operation temperature	-40°C / +120°C
Outer diameter	21.2 mm
Entry thread (G)	M20x1.5
Diameter Ø I	15.0 mm
Diameter Ø B	29.5 mm
Dimension C	12.0 mm
Dimension D	48.0 mm
Wrench size	28 mm
Dispatch	25

#### Available on request:

- Executions with short entry thread