
Earthing and equipotential bonding





- · For two 4 to 50 mm² cables or two circular conductors up to Ø 8 mm
- · low contact resistance due to two terminals
- · Tinned brass



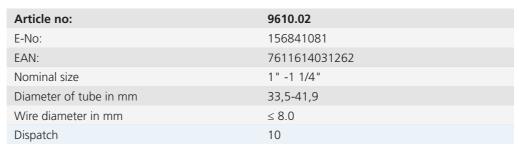

Tinned brass earthing clamps provide a secure connection to metal piping for water or heating supply and connect it to the main equipotential bonding.

- · For connecting metallic conduits to the main potential equalisation point
- · Durable contact between conduit and potential equalisation conductor
- · Two contact screws provide large conductor contact surface
- · Easy connection of multiple adjacent conduits to the potential equalisation point without interrupting the potential equalisation conductor
- · Potential equalisation is not interrupted when removing a conduit

